

uEZGUI-2478-43WQS Touch Screen LCD Kit

For the NXP LPC2478



SHARP
MICROELECTRONICS
OF THE AMERICAS

0.50"
thick



Highlights

Features

- Sharp 4.3" TFT WQVGA 480 NIT LCD Panel with integrated Touch Screen
- NXP LPC2478 CPU running at 72MHz (with 512KB internal Flash)
- 8MB of TSOP SDRAM (optional to 32MB)
- 8MB of external TSOP NOR FLASH (optional to 16MB)
- 2GB microSD Memory Card
- NV Data Storage via I2C EEPROM
- USB Device Mini-B for power and PC communications
- Low power, Real-Time Clock with Supercap Backup
- On-board Speaker
- 3-axis Accelerometer
- Temperature Sensor
- Mini-JTAG Debug Connector
- Fine Pitch I/O Connector for External Expansion
 - Serial Ports, UART, I2C, SPI, USB Host/Device
 - RMII interface for Ethernet 10/100



Software

- uEZ™ / FreeRTOS Rapid Development Platform
- uEZ™ GUI enhancements with Nano-X/FLNX
- MicroSD card appears as a USB Flash Drive to the PC
- Support for customer down load of logos, JPEG images and menu keys
- Rowley CrossWorks Compiler and Tool Suite
- Segger J-Link Lite JTAG for programming and debug



Rowley Associates



FDI *Future Designs, Inc.*
Your Development Partner

Features




The NXP LPC2478 ARM7TDMI-S based microcontroller runs the open source μ EZ™ + FreeRTOS software platform. The LPC2478 has 512KB of internal Flash memory, 96KB of internal SRAM, a 10/100 Ethernet Media Access Controller (MAC), a USB full speed device/host/OTG controller, four UARTs, two CAN channels and a collection of serial communications interfaces. The μ EZ GUI board also includes 8MB of external SDRAM and 8MB of external NOR Flash.

Software Included

μ EZ™ (pronounced Muse) is an open source rapid development platform that supplies application developers with an extensive library of open source software, drivers, and processor support - all under a common framework. μ EZ™ allows companies to focus on innovation and their value-added applications while minimizing development time and maximizing software reuse.

The diagram below shows a typical embedded application stack. The μ EZ™ components comprise three primary categories to simplify embedded application development:

- Operating System Abstraction Layer (μ EZ™ OSAL)
- Sub-system drivers (ex: μ EZ™ TCP/IP, μ EZ™ USB, μ EZ™ Driver)
- Hardware Abstraction Layer (μ EZ™ HAL)

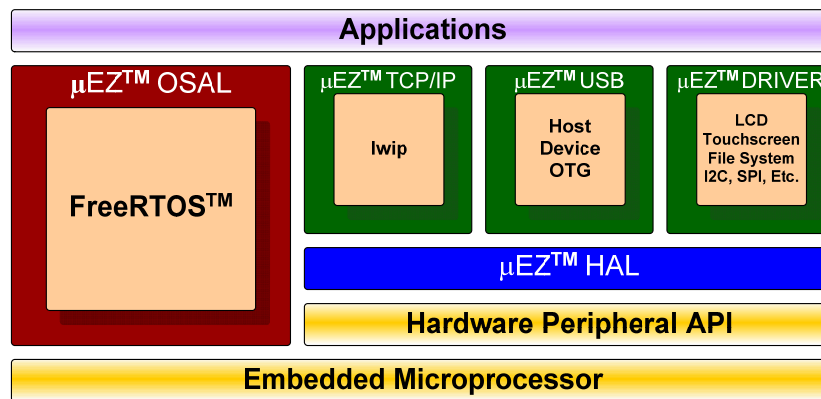

The **uEZGUI-2478-43WQS** is designed to be used as an “off-the-shelf” Graphical User Interface (GUI) or Human Machine Interface (HMI) in a variety of end customer applications. The miniature, self-contained design is well suited to be embedded directly into your product or FDI offers prepackaged versions for stand-alone use. FDI also offers low cost customization services for customer specific hardware, software or packaging applications at volumes of 500 units or more.

Ordering Information

Part Number: **uEZGUI-2478-43WQS**
NXP Part Number: **OMxxxx**
Suggested Resale Price: **\$299.00(USD)**
Order Online at: www.digikey.com
www.mouser.com

Warranty: **30-day money back guarantee**
Phone **256-883-1240** Fax **256-883-1241**
sales@teamfdi.com www.teamfdi.com

Kit Contents:

- μ EZ™ GUI 4.3” Board with LPC2478
- Sharp 4.3” WQVGA Touch Screen LCD
- USB Device cable for Power and PC communications
- Mini JTAG Debugger with cables
- μ EZ™ / FreeRTOS E-Book on microSD card

Download Users Manual, documents, schematics, and software examples at: www.teamfdi.com/uEZGUI